

flotates wastewater
digestate grease trap
percolate FOG
leachate
slurry
COD

MKR Evaporation Systems

ROBUST. SAFE. FLEXIBLE. EFFICIENT.

- Heat driven Evaporators
- Hybrid Systems with Heat Pump
- Electric MVR Evaporators



Digestate and slurry is a valuable organic fertilizer, but it incurs high transport and storage costs and affects the nutrient balance of soils. Evaporators are an innovative and ecological solution for the treatment of digestate from biogas plants, pig slurry or any liquid media.

With MKR Cleanwater's evaporators, you can solve these problems and obtain clean water and a mineral fertilizer at the same time.

Waste heat and hybrid system DV:

Two sizes: 180 kW_{th} and 500 kW_{th}, with 1–4 stages each.

Maximum efficiency of 4 stages: 4.3 litres of distillate per kWh of heat.

Electric evaporators (Mechanical Vapour Recompression):

Several sizes, with distillate production rates ranging from 0.3 to 2.0 m³/h.

Power consumption is approx. 40 kWh_{el} per m³ of distillate.

History

MKR Metzger develops industrial recycling technology since 1990



2009/10 Project start digestate evaporator

First pilot projects based on existing industrial evaporators



2012/13 first practical plants single-stage, approx. 2000 m³ reduction



Since 2016/17 multi-stage evaporators with >20,000 m³/a reduction per line

Starting in 2024 adapting electrical MVR evaporation systems for pig slurry and other thin organic media with ammonia recovery



Today

Active throughout Europe, mainly residual / food waste plants and farm manure plants.

MKR Evaporation Systems

ROBUST. SAFE. FLEXIBLE. EFFICIENT.

- Heat driven Evaporators (DV Series)
- Hybrid Systems with Heat Pump
- Electric MVR Evaporators

Electrical Driven Evaporators (Mechanical Vapour Recompression)

Small footprint

Up to 20 - 25 liter
distillate per kwh_{el.}

Control
cabinet

Siemens
PLC

Heat exchanger


Circulation
pump

Evaporation room

Bag filter unit

MVR Evaporators

Operating Principle

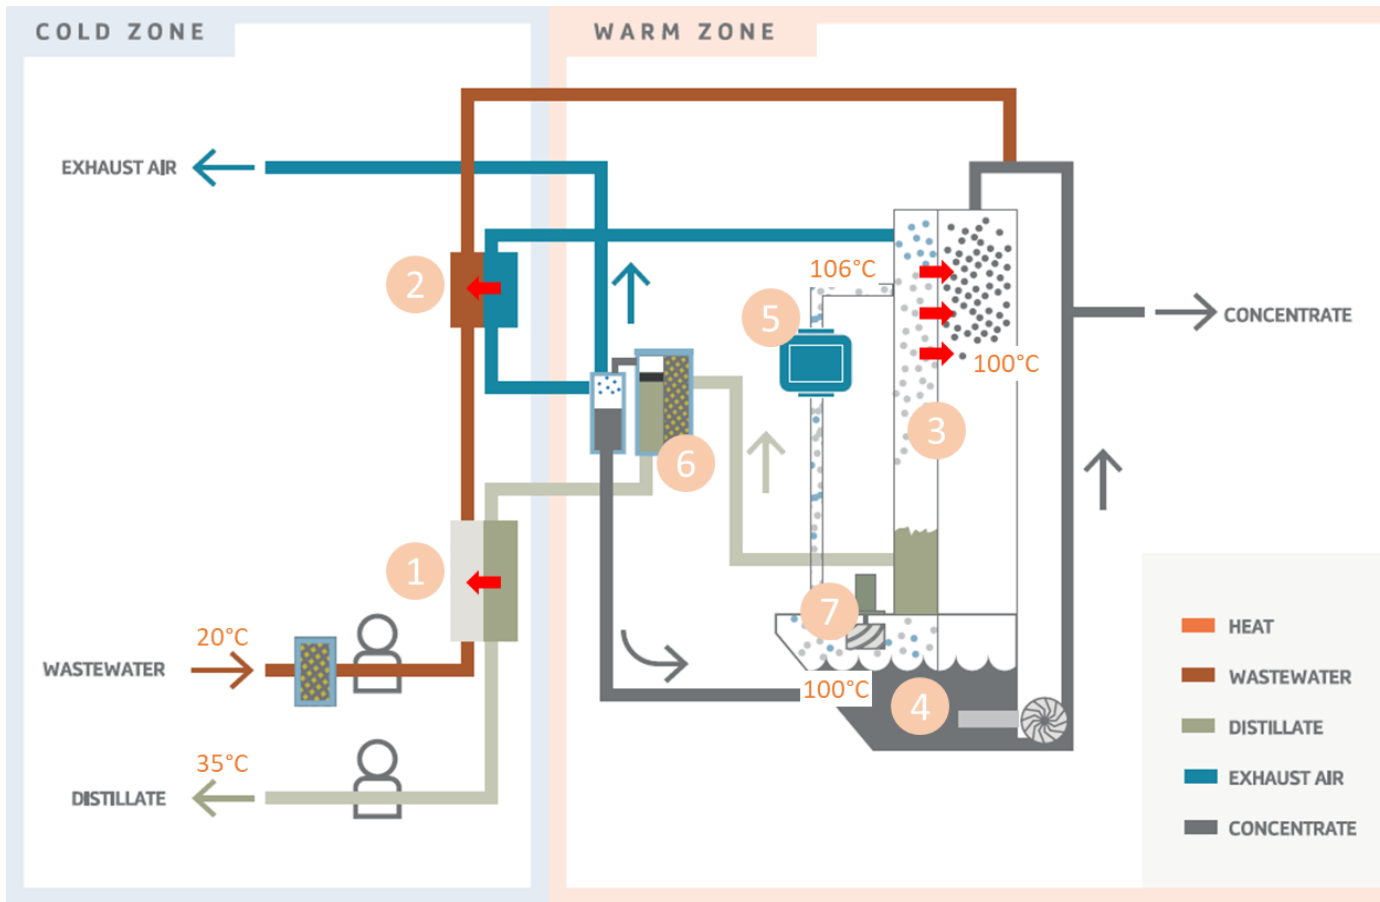


The slurry goes through three heat exchanger (1,2 & 3) to the process tank (4). Here it is circulated and heated by the main heat exchanger (3).

The steam (7) is compressed (5) (approx. +200mbar) and has now a temperature of about 106°C.

On contact with the heat exchanger (3) the steam condensates and becomes distillate(6).

MVR Evaporators Operating Principle

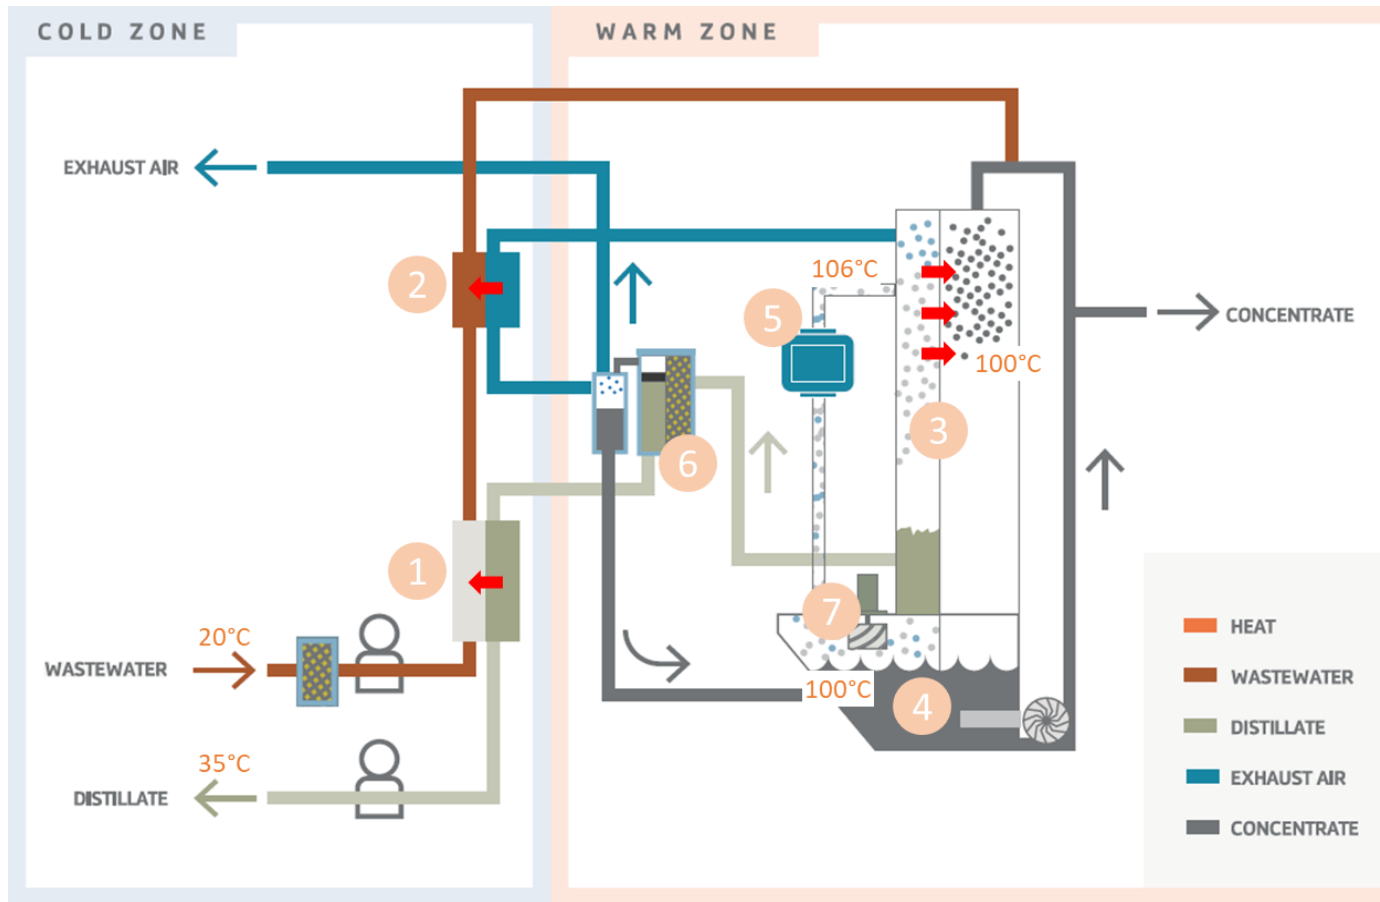

For media containing ammonia, a vapor scrubber is installed to remove ammonia from the vapor before condensation at the heat exchanger (3).


The exhausted air (via heat exchanger 2) and the distillate (via heat exchanger 1) leave the evaporator. The concentrate (from tank 4) is pumped regularly out of the machine.

MVR Evaporators Insights – Energy Efficiency




HIGH ENERGY RECOVERY

A 3-stage recuperation paired with the largest heat exchanger in its class enables a smooth and energy-saving evaporation.

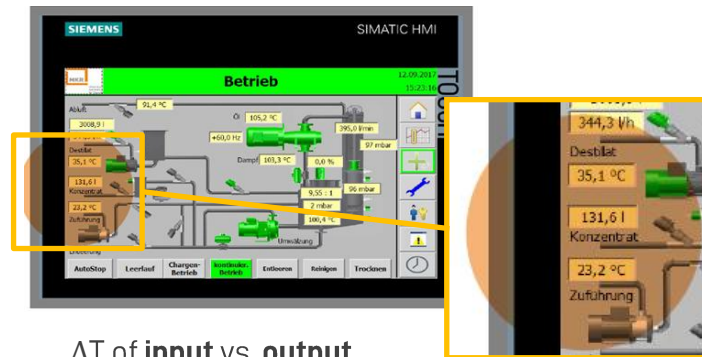


ΔT of input vs. output

- MKR Evaporator just $\sim + 12-15^\circ\text{C}$
- $\Rightarrow \Delta T$ is equivalent to the **losing energy** during the process

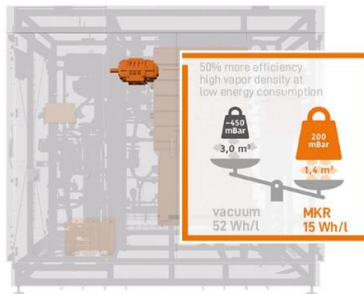

50% LESS ENERGY CONSUMPTION

The highest steam density requires less compressor capacity and thus a lower energy demand. (< 50%)

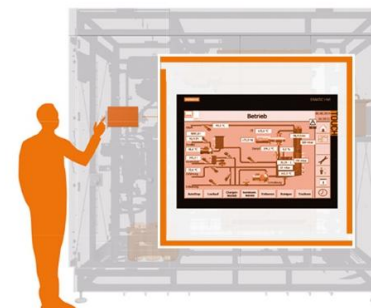

20 % MORE PERFORMANCE DUE TO INTELLIGENT CONTROL


An intelligent and simple system control enables the maximum utilization of the energy used.

Operating Data Electrical Evaporator

	MVR05	MVR10	MVR20
Intake Volume Flow	500 l/h	1000 l/h	2000 l/h
Distillate Flow (max.)	450 l/h	900 l/h	1800 l/h
Vaporisation Performance	25 l/kWh _{el}	25 l/kWh _{el}	25 l/kWh _{el}
Unladen Wight	4,8 t	8 t	14 t
Length	4,45 m	4,45 m	5,6 m
Width	2,35 m	2,8 m	2,8 m
Hight	3,1 m	3,1 m	3,1 m
Operating Voltage	3/400 V N PE 50 Hz	3/400 V N PE 50 Hz	3/400 V N PE 50 Hz
Dry Matter Content (Input)	< 2 % TS	< 2 % TS	< 2 % TS

Intermediate sizes available too.

MVR Evaporator with Vapour Scrubber

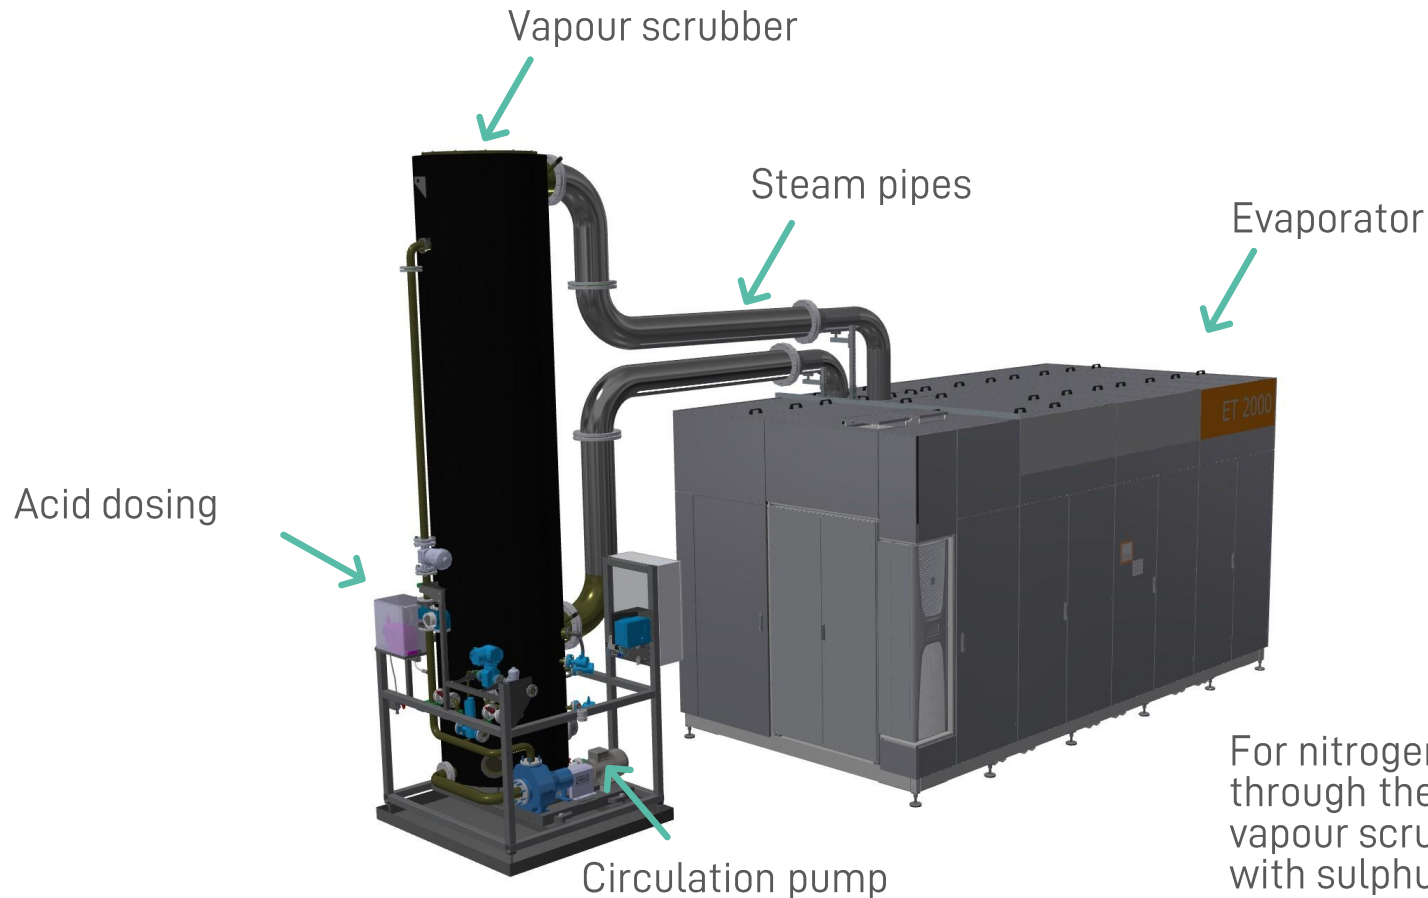

For nitrogen binding, the steam is fed through the steam pipes into the vapour scrubber, where it is washed with sulphuric acid in a counterflow process to produce ASL.

→ *Integrated steam stripping*

Application Case

Pig Slurry Evaporation

Farm level or Decentralised

MVR Evaporator



Optional:
Phosphorous removal

Pig slurry




Pig stables

-> Secured slurry export / pickup

Nitrogen as „green“
Ammonia sulfate or Aqueous ammonia
-> high concentrated, transportable
and useable in other industrie
branches


Concentrated slurry – input for
AD
-> only approx. 20% volume but
with same energy content and
lowered ammonia content



Bio-Methane or Biogas-CHP plant
-> easy to handle nitrogen lowered feed with
attractive CO2 certificate options
-> much less fermentation volume is required


Application Case

Pig Slurry Evaporation

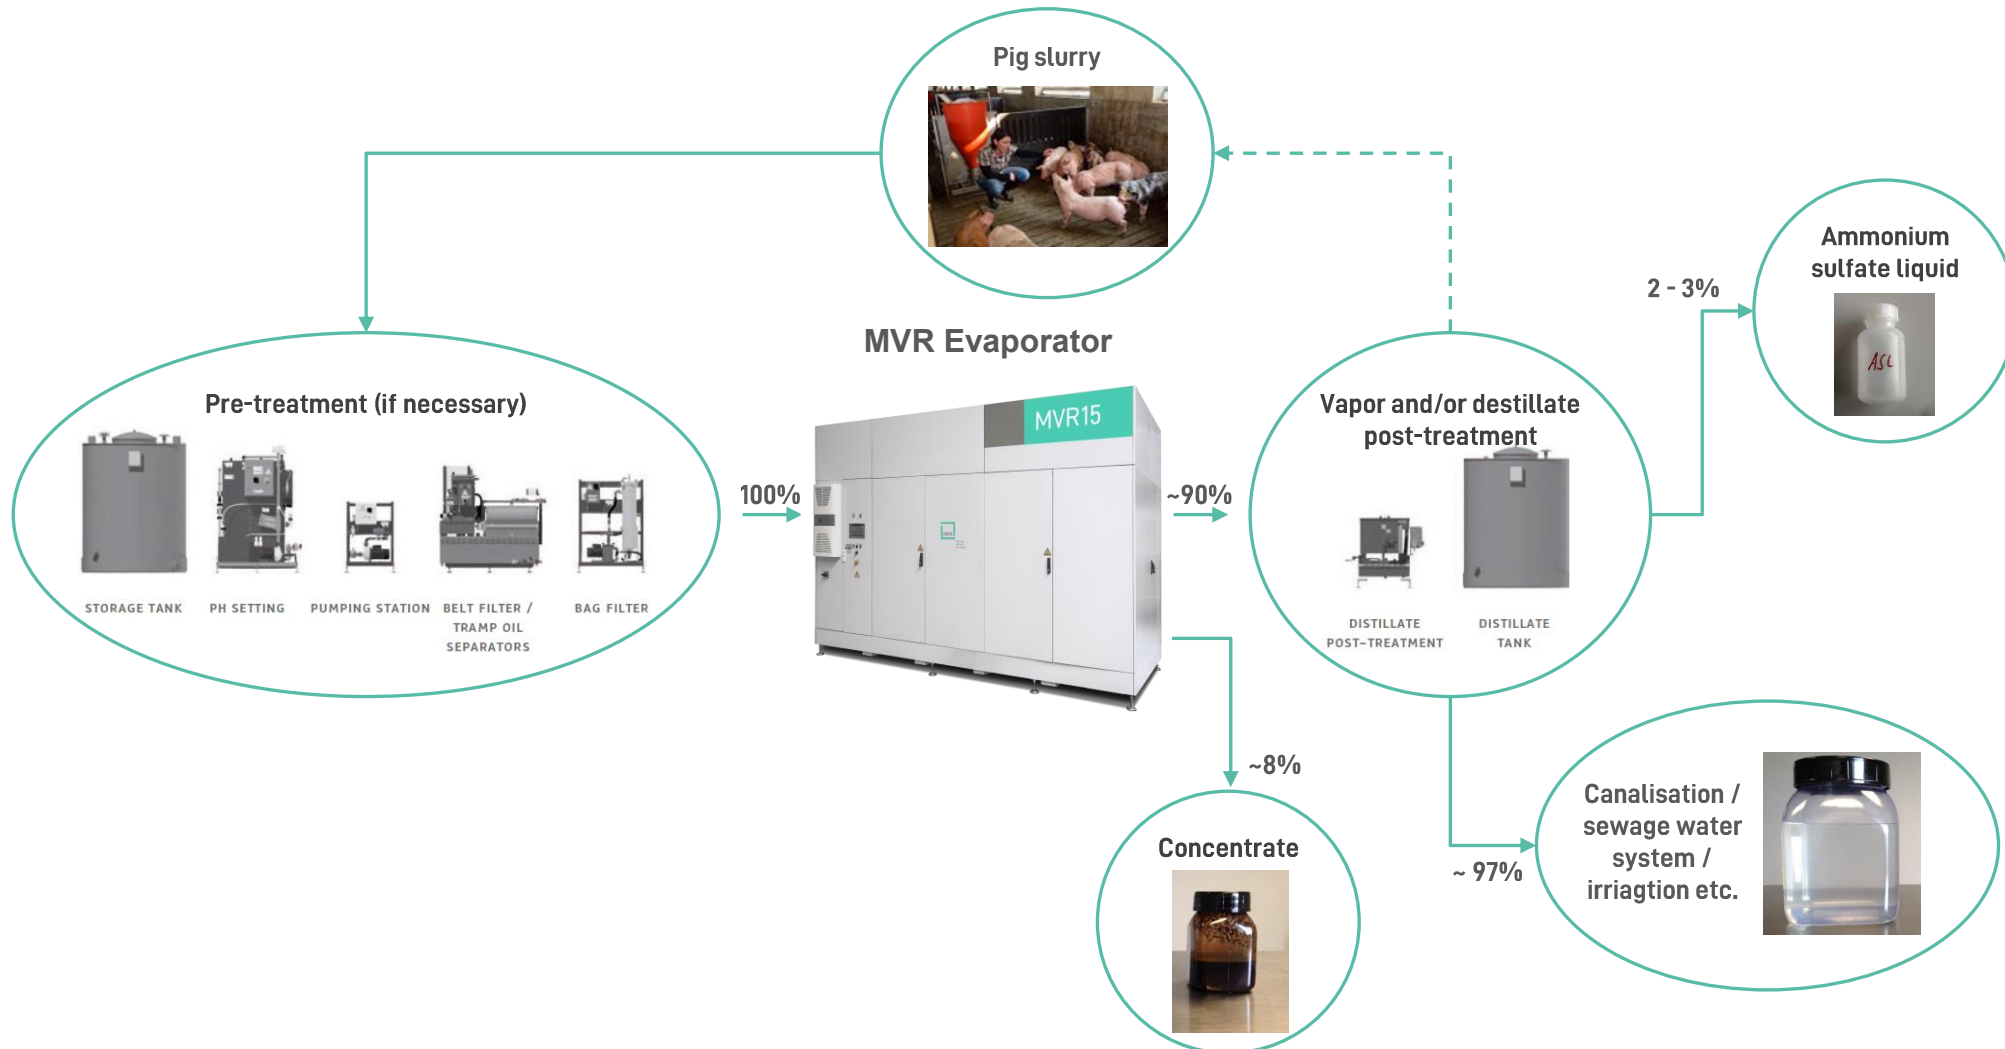


Application Case

Excrement Separation with Evaporation

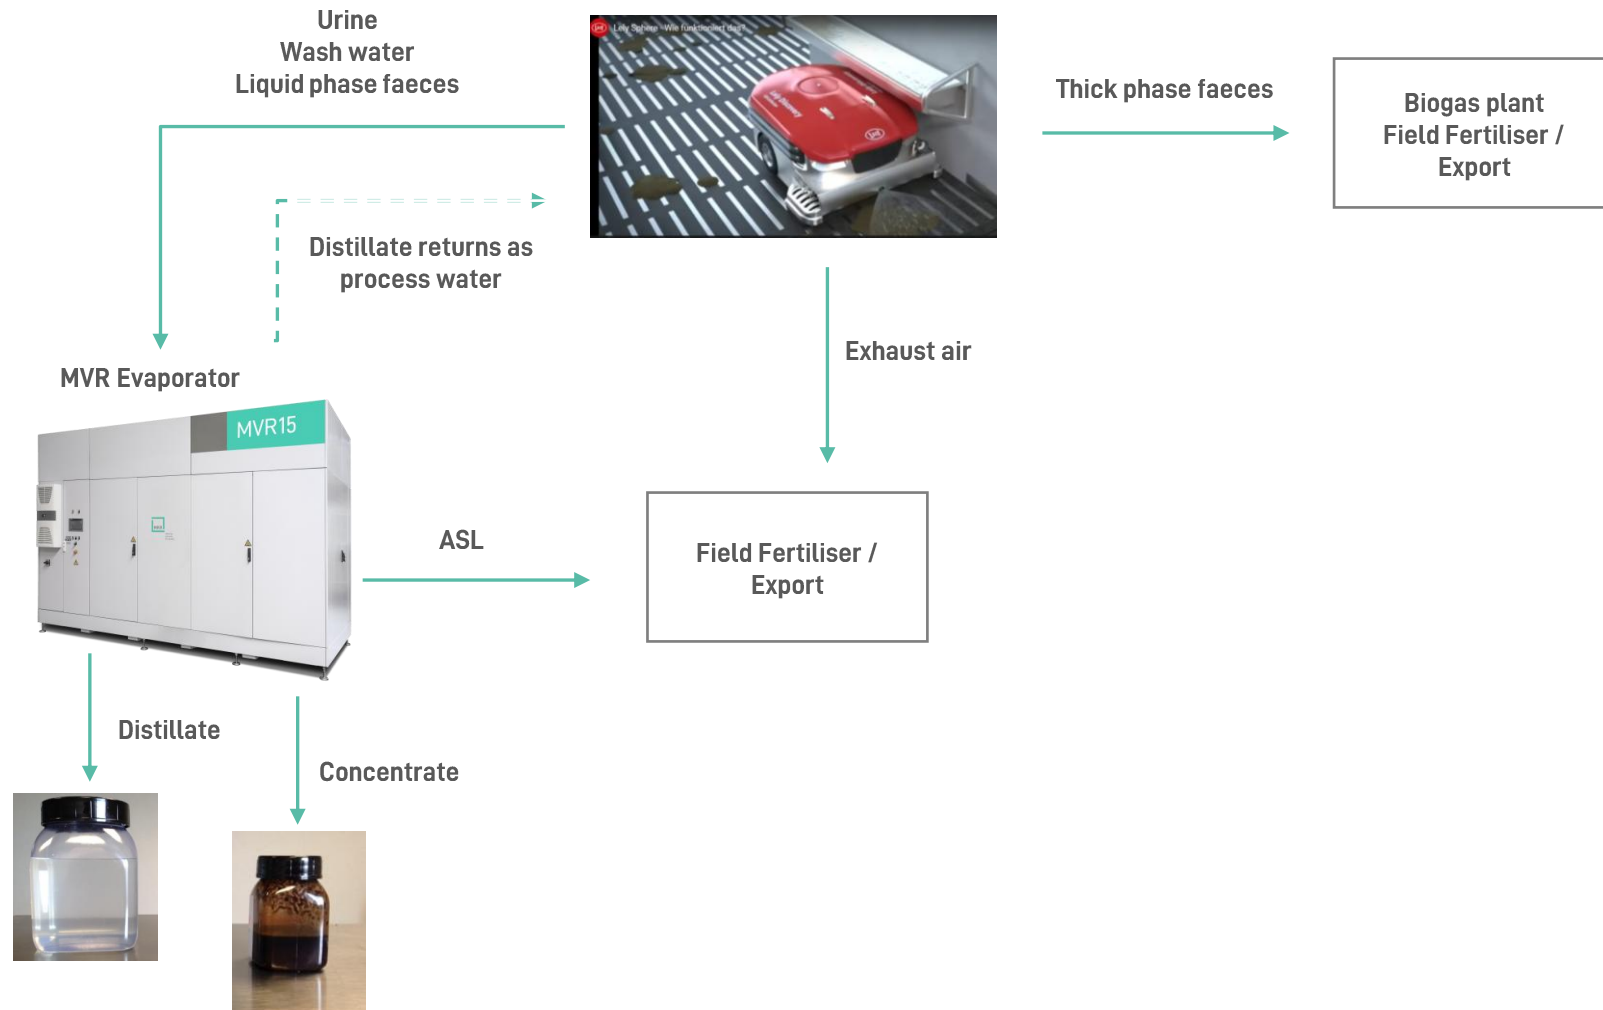

Application Case

Evaporation of other Media

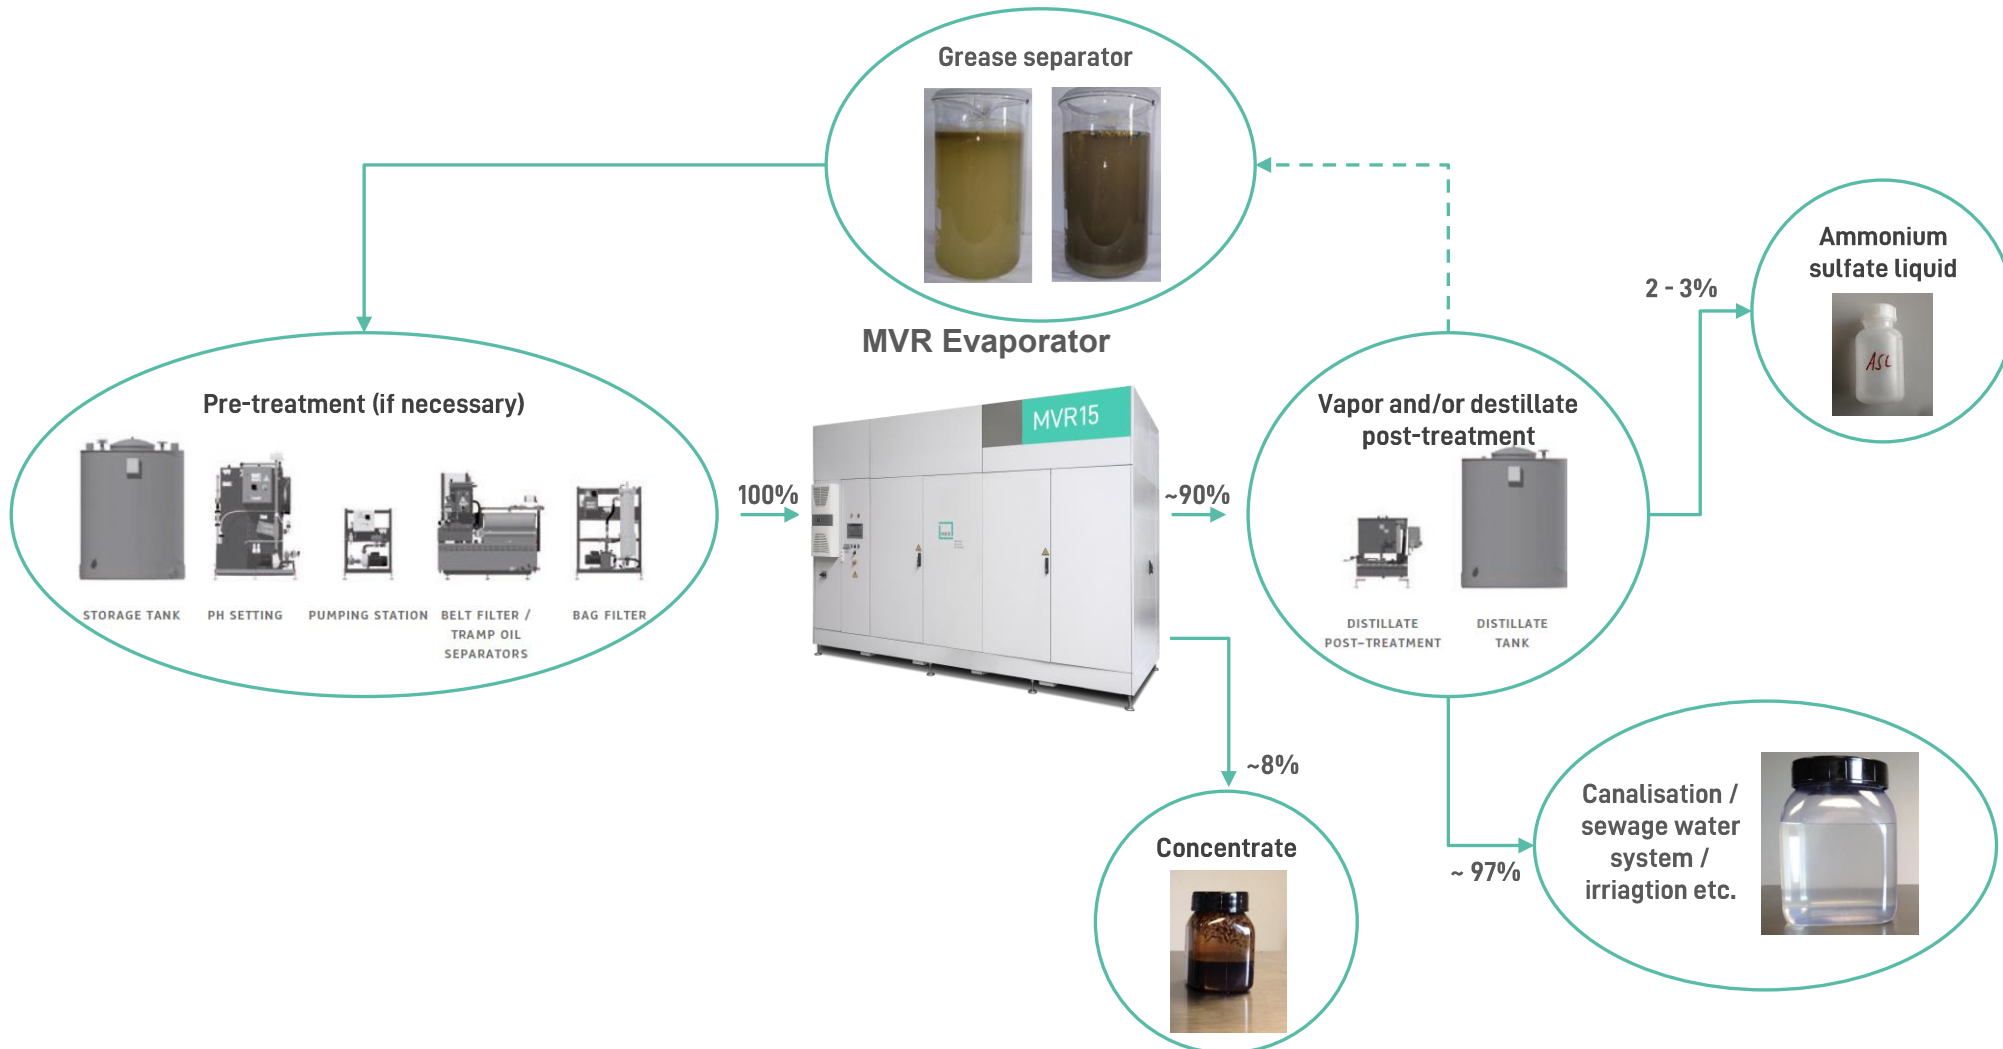


Advantages



Parts in contact with digestate are made of **stainless steel**.

No brushes or moving parts in the media, means low maintenance costs!

PLC programme and control cabinet construction **completely from MKR.**

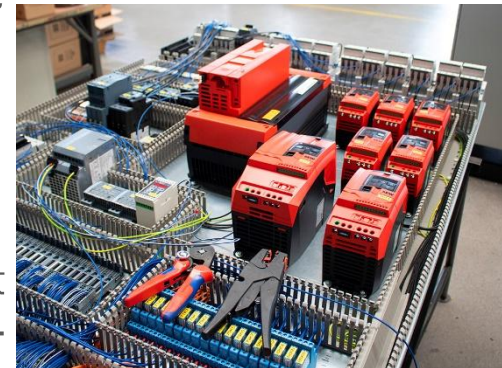

Components for sulphuric acid and vapour scrubbers made of **stainless steel** as well, thus durable and no corrosion.

Know-how for odourless and dischargeable distillate.

Find more:
www.mkr-cleanwater.com



Advantages

- Ideal for media with low solid content
- Parts in contact with media in **stainless steel** - higher grades possible for chloride-containing wastewater
- **Modular design**, no up and down scaling of technology just more modules
- No moving parts such as brushes in the digestate - thus significantly **lower maintenance** requirements.
- **Regular automatic acid/alkaline rinsing** removes even the finest organic as well as mineral deposits
- mechanical foam breakers
- **Highest electrical efficiency** (up to 20 - 25 Liters / kwh_{el.})
- **Lowest operating costs** per m³ distillate
- Only little amount of digestate in the system, approx. 500 liter per modul, therefore a **quick heat-up phase / start-up phase** for evaporators

Why should you choose MKR evaporation technology?

- **Robust, durable technology** made of stainless steel
- **Energy-efficient** four-stage heat driven and electrical driven systems.
- **Modular and compact design**
- The technology is based on **25 years of experience** and know-how with evaporation technology and 15 years of experience with digestate.

Thank you for your interest so far.

For more information, mass balances, offers
just get in touch:

Michael Köhnlechner

Mobil: +49 172 81 80 314

Tel.: +49 9091 50 00 0

m.koehnlechner@mkr-cleanwater.de

[Michael Köhnlechner | LinkedIn](#)

Elliot Freitag

Mobil: +49 1520 9599 322

e.freitag@mkr-cleanwater.de

[Elliot Freitag | LinkedIn](#)